



Content:

8K

Page 5

5K

Page 3

4K

Your **travel** companions

Four different video ports

Item 63959 USB Type-C™ adapter for a
VGA, HDMI, DVI or DisplayPort monitor



- Chipset: CH7213, PS8348B, PS176, RTD2166
- DisplayPort 1.2 and High Speed HDMI specification
- DisplayPort and HDMI up to 3840 x 2160 @ 60 Hz

Good Idea

From standard
to exotic

www.delock.com



Adapter

**4K
60Hz**

62708 Adapter Thunderbolt™ 3 to 2 x DisplayPort

- Connector:
1 x Thunderbolt™ 3 USB Type-C™ 24 pin male to 2 x DisplayPort 20 pin female
- Thunderbolt™ 3 and DisplayPort 1.2 specification
- Data transfer rate up to 40 Gbps
- Resolution up to 4096 x 2160 @ 60 Hz (depending on system and hardware)
- Transfer of audio and video signals
- Thunderbolt™ 3 bus powered
- Dimensions of the adapter (LxWxH): ca. 99 x 60 x 16 mm
- Cable length without connector: ca. 27 cm



62707 Adapter Thunderbolt™ 3 to 2 x HDMI

62634 Adapter Thunderbolt™ to USB 3.0 Type-A

- Connectors:
1 x Thunderbolt™ male to 1 x USB 3.0 Type-A female
- Chipset: Asmedia ASM1042A
- Thunderbolt™ specification:
Supports the operating of Thunderbolt™ 1 Lane and PCIe Gen2 1x2 or 2x1
Thunderbolt™ 10 Gbps
Compliant to PCI Express Rev. 2.0 standard
- Length incl. connectors: ca. 15 cm



Enclosures

42510 2.5" External Enclosure SATA HDD to Thunderbolt™ (up to 15 mm HDD)

Data
transfer
6 Gb/s




internal:

- ① 1 x SATA 6 Gb/s 22 pin receptacle

external:

- ② 1 x Thunderbolt™ female
- ③ 1 x DC jack

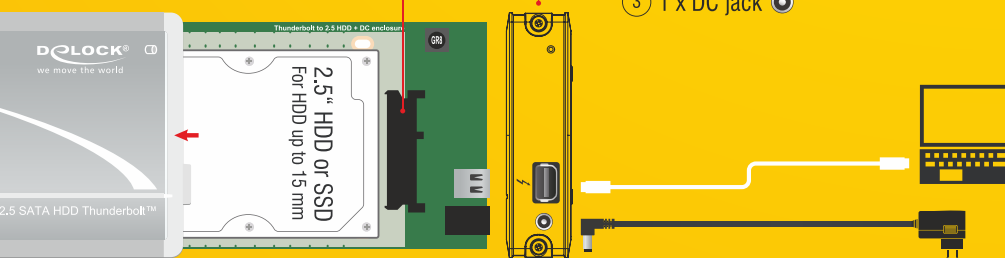

- Connectors:
external:
1 x Thunderbolt™ female
1 x DC jack
internal:
1 x SATA 6 Gb/s 22 pin receptacle
- Chipset: Asmedia
- Suitable for 2.5" SATA HDD / SSD:
HDD height up to 15 mm
SATA HDD / SSD up to 6 Gb/s
HDD / SSD up to 13 TB
supports 5 V HDD / SSD
- Dimensions (LxWxH): ca. 139 x 80 x 21 mm

M.2

42568 External Enclosure 2 x M.2 Key B to USB 3.1 Gen 2 with RAID

Super
Speed
10 Gbps

RAID
function



- Interface: SATA
- Chipset: Asmedia ASM1352R
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Enclosure with full-PCB
- Dimensions (LxWxH): ca. 136 x 80 x 16 mm

RAID
function



42571 External Enclosure 2 x mSATA to USB 3.1 Gen 2 with RAID

RAID
function



42582 External Enclosure 2 x CFast to USB 3.1 Gen 2 with RAID

Extend & mirror
also with macOS



87725 Thunderbolt™ 3 Docking Station



5K



Frontside



Backside

- **Resolution** up to: (depending on system and the hardware)
Windows: 1 x 5120 x 2880 @ 60 Hz
2 x 3840 x 2160 @ 60 Hz
Mac: 2 x 3840 x 2160 @ 30 Hz
- Transmission of audio and video signals
- Metal housing
- Dimensions (LxWxH): ca. 230 x 87 x 27 mm

- **Frontside:**
1 x USB 3.0 Type-A female
1 x USB 3.0 Type-A female - Battery Charging specification BC1.2
1 x SD / SDHC / SDXC slot
1 x Headset 3.5 mm 4 pin jack

- **Backside:**
1 x Thunderbolt™ 3 female (connection to computer)
1 x Thunderbolt™ 3 female
1 x HDMI-A 19 pin female
3 x USB 3.0 Type-A female
1 x Gigabit LAN 10/100/1000 Mbps RJ45 jack
1 x DC jack



SSD

54007 Thunderbolt™ 3 External Portable SSD 480 GB – M.2 PCIe NVMe

- Connector:
1 x Thunderbolt™ 3 USB Type-C™ 24 pin male
- Interface: PCIe Rev. 3.0
- Maximum read speed: 2800 MBps
- Maximum write speed: 2300 MBps
- Passive cooling of the memory by the metal housing with integrated cooling fins
- Dimensions (LxWxH): ca. 108 x 65 x 14 mm
- Cable length without connectors: ca. 16 cm



max write
2300
MBps

max read
2800
MBps

480
GB

54000
Thunderbolt™ 3
External Portable **240 GB**
SSD M.2 PCIe NVMe

M.2 NVMe

4 | USB Type-C™

90308

PCI Express x8 Card to 8 x external USB Type-C™

Premium
★★★★★

8 x USB 3.1 Type-C™ 5 Gbps

• Connectors:


external:

- ① 8 x SuperSpeed USB (USB 3.1 Gen 1) USB Type-C™ female

internal:

- ② 1 x PCI Express x8, V2.0
- ③ 1 x SATA 15 pin power connector
- ④ 1 x 4 pin power connector

- Chipset: Renesas uPD720202
- Electrical power per port: max. 7.5 watt (5 V / 1.5 A)
- USB ports with screw holes (M2 x 0.4)
- Screw distance: 15 mm

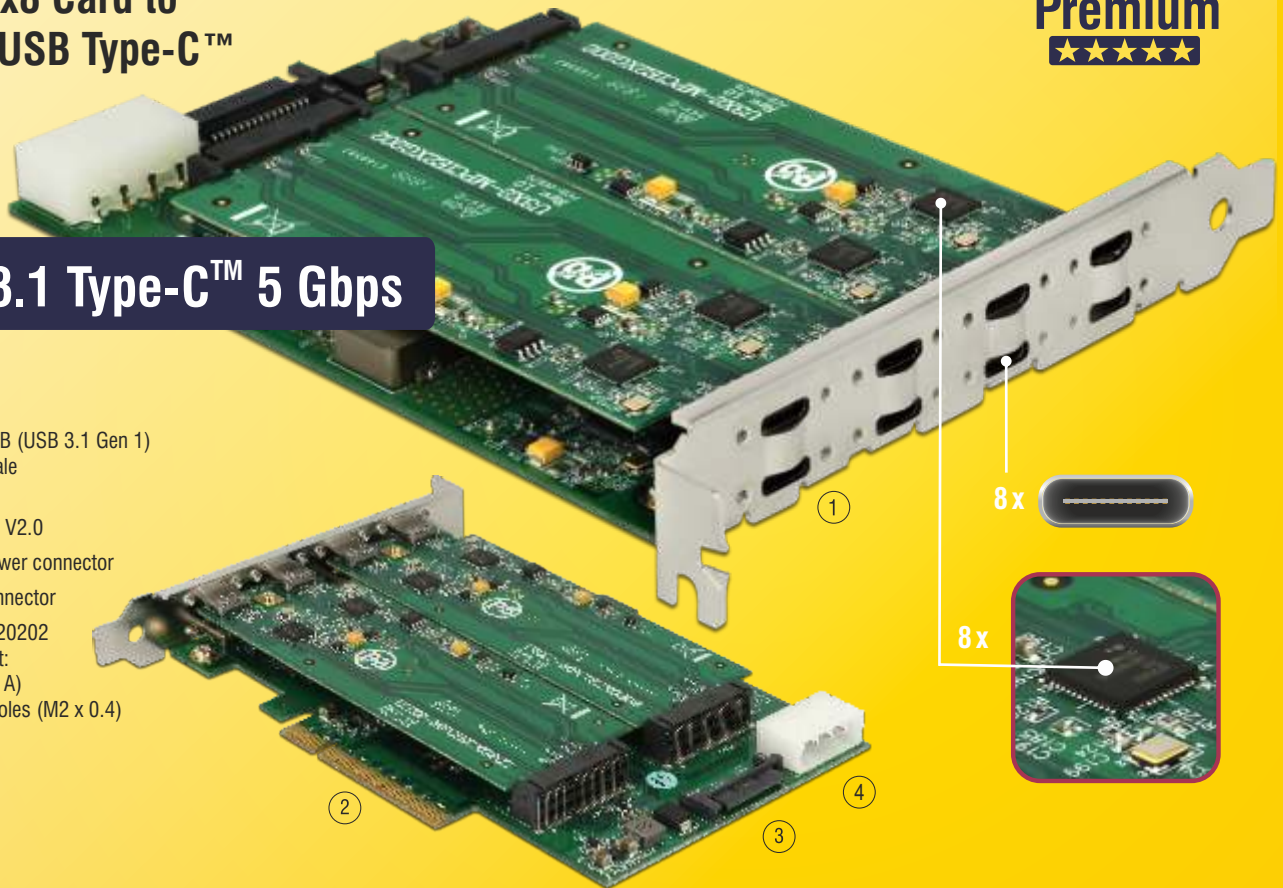

90299

PCI Express Card to 1 x USB Type-C™ + 1 x USB Type-A


• Connectors:

external:

- 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
- 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A female

internal:

- 1 x SATA 15 pin power connector
- 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Power supply via PCI Express interface or via 15 pin power connector

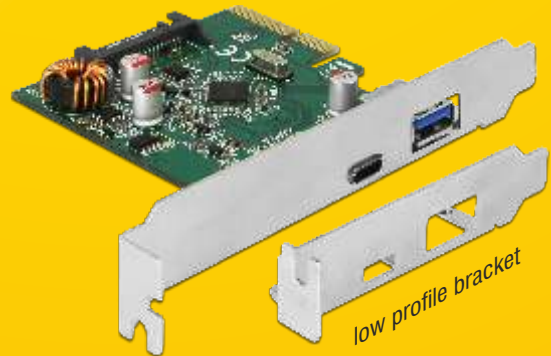

63937

USB Type-C™ Adapter to HDMI (DP Alt Mode) 4K 60 Hz with HDR function

- DisplayPort 1.4 and High Speed HDMI with Ethernet (HEC) specification
- Resolution up to 3840 x 2160 @ 60 Hz (depending on system and hardware)
- Supports HDR / HDR10
- Supports HDCP 1.4 and 2.2
- Supports 3D displays (1080p @ 120 Hz)



HDR

(High Dynamic Range) Supporting HDR, the adapters are ideal for home cinema and gaming applications. Colours are realistically displayed with impressive depth, brightness and contrast are optimally reproduced.

63935

Mini DisplayPort 1.4 Adapter to HDMI 4K 60 Hz with HDR function Passive



63936

DisplayPort 1.4 Adapter to HDMI 4K 60 Hz with HDR function Passive




8K
60Hz

48
Gbps

Image & Sound via Ultra High Speed HDMI cable by Delock



- High-quality Ultra High Speed HDMI cable
- Connects HDMI devices, such as televisions, Blu-ray players, monitors or projectors
- Perfect sound through eARC support

eARC
Support

85726 0.5 m
85727 1 m
85728 1.5 m
85729 2 m

The Delock HDMI cable **supports Enhanced ARC (eARC)**. This allows HDMI devices such as Blu-ray players to be connected directly to the TV. The uncompressed audio signals are then transmitted directly and lossless to the connected sound system via the audio return channel.



D8K

32.4
Gbps

DisplayPort cable 8K 60 Hz
DP 8K certified

- DisplayPort® DP 8K certified cable
- Resolution up to 7680 x 4320 @ 60 Hz (depending on system and hardware)
- Supports HDR
- Up to 1536 kHz audio sampling rate

85658 1 m 85661 3 m
85660 2 m 85663 5 m

Mini DisplayPort to DisplayPort
cable 8K 60 Hz DP 8K certified

84927 1 m 84928 2 m

Magnetic Cables



magnetisch



Charging

85705
Magnetic
USB Charging Cable Set for
8 Pin / Micro USB / USB Type-C™

- Green LED indication during charging process
- Cable with textile shielding
- Connector with metal housing
- Length incl. connectors (L): ca. 1 m



Charging


Data
Transmission

85723
Magnetic
USB Data and Charging Cable Set
for Micro USB / USB Type-C™

- Cable with textile shielding
- Connector with metal housing
- Length incl. connectors (L): ca. 1.1 m



12556 USB Mouse Pad with RGB Illumination

- Connector: 1 x USB Type-A male
- 1 x on / off button, switch
- Flexible soft mouse pad
- RGB border with 7 different shades
- 3 different colour modes: Setting of one single colour / Selected colour flashes smoothly / Rainbow colour gradient
- Cable length: ca. 2 m



12554 USB Mouse Pad with RGB Illumination

- Dimensions mouse pad (LxWxH): ca. 35 x 26 x 0.3 cm

Pads also available
different sizes



12531 Optical 4-button USB Gaming Mouse

- For right and left handers
- 2 standard buttons, 1 scroll wheel and 1 DPI button
- Settings: dpi-value; backlight; programmable keys scroll wheel
- Sensitivity: 800 / 1200 / 1600 / 2400 dpi – DPI button 3200 / 4800 dpi – Software setting
- Polling rate: 500 Hz



Suitable gaming
Equipment perfects
every game experience

Included Wrist Rest

12552 Ergonomic optical 5-button mouse 2.4 GHz wireless with Wrist Rest - left handers

- Connector: 1 x USB 2.0 Type-A male
- Compact nano USB receiver
- 4 standard buttons, 1 scroll wheel and 1 DPI button
- Magnetic wrist rest detachable
- Sensitivity: 800 / 1000 / 1600 dpi
- Polling rate: 125 Hz
- Sensor light colour: red




12528 Ergonomic vertical optical 5-button mouse



12536 Optical 3-button mouse white / pink



12526 Optical 3-button mini mouse USB Type-C™



12537 Optical 3-button LED Mouse USB Type-A




12530 Optical 3-button USB Desktop Mouse - silent





Newsletter
Microphones

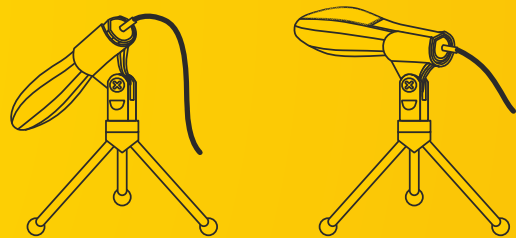

63972



USB Charger – 1 x USB Type-C™ 3 x USB Type-A

- Connectors:
1 x USB Type-C™ female
3 x USB Type-A female
1 x IEC-60320-C8 connector
- Input: AC 100 ~ 240 V / 50 ~ 60 Hz / 2 A
- Output:
USB Type-C™ Power Delivery (PD):
5 V / 4 A, 9 V / 12 V / 15 V / 20 V 4,3 A
USB Type-A Qualcomm Quick Charge 3.0 Class A:
3.6 ~ 6.5 V / 3 A, 9 V / 2 A, 12 V / 1,5 A
- Output power: max. 87 W total
- Over load protection, Over current protection,
Overheating protection, Short circuit protection
- Dimensions (LxWxH): ca. 110 x 98 x 20 mm


41431  41432 



Qualcomm
quick charge 3.0



Inclusive
Cables and
Adapters

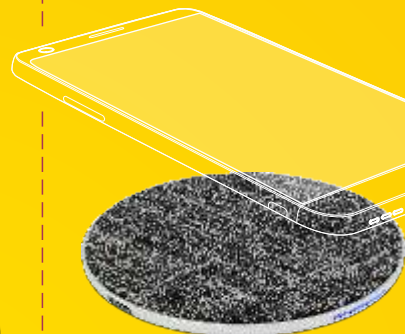

65919 Wireless Qi Fast Charger 7.5 / 10 W



- Connector:
1 x USB Type-C™ female
- Bicolour LED:
blue / red: power on
blue pulsating: charging in progress
red: standby
red blinking: error
- Housing material: metal
- Fabric cover
- Anti-Slip base
- Dimensions: Ø ca. 88 mm,
height ca. 7 mm

63933 USB Type-C™ Adapter to VGA (DP Alt Mode)



62977 USB Type-C™ Adapter to DisplayPort (DP Alt Mode)

4K
60Hz



62978 USB Type-C™ Adapter to HDMI (DP Alt Mode)

63941 USB Type-C™ Adapter to VGA (DP Alt Mode) - Key Chain

- Connectors:
1 x USB Type-C™ male to
1 x VGA 15 pin female
- Chipset: Realtek RTD2169U
- Resolution up to 1920 x 1080 @ 60 Hz
(depending on system and hardware)
- USB bus powered
- Plug & Play



4K
60Hz

- Resolution up to
3840 x 2160 @ 60 Hz
(depending on system
and hardware)
- Transmission of audio
and video signals



mini DP
63939



DisplayPort
63940



HDMI
63942

More detailed information about our products can be found at

www.delock.com

Good Idea

The items offered are available while stocks last. All logos and trademarks are the property of their respective owners. Specifications, delivery times and errors reserved.